


# WideTEK®

## Accessories

### 21" Full HD Touch Mounting Bridge

Versions for WT36CL and 48CL



**Complete scanner control through  
ScanWizard and 21" touchscreen.  
Zero footprint, works on all stands.**



© 09\_2022 / EN

## WideTEK 36/48CL Touchscreen Monitor Option

The WT36/48CL-SCREEN-BRIDGE allows positioning a full HD 21" touchscreen on top of any WT36CL/48CL scanner. The monitor bridge is mounted to the sides of the scanner and spans across the top, leaving enough space for documents to be returned to the front.

Due to the unique mounting method, the bridge does not require any additional footprint. It also works on any WT36CL or WT48CL regardless of floor stand or printer stand.

The monitor features 16:9 full HD (1920 x 1080) resolution and a 3,000:1 high contrast ratio. Combined with a wide (178°/178°) viewing angle, it is ideally suited for effective job handling including high resolution previews.


No PC is needed, everything can be done on the touchscreen, including sending images over the network to any destination in the world. With the full ScanWizard functionality onboard, manage the scanner and its settings, zoom in and preview your scanned images for highest quality assurance and best productivity.

## Features

- Runs the ScanWizard scanner control software on a modern multitouch full HD screen with 1920 x 1080 pixels.
- Zoom and pan scanned images in real time like on a smartphone.
- Paper path and scanner service position are not obstructed.
- A variety of mounting options for many different screen positions.
- Assembly time is less than 20 minutes, only one tool required.
- Intelligent cable handling routes all cables neatly to the back.
- Two versions, for WideTEK 36CL and WideTEK 48CL scanners.
- Power consumption of only 20VA (typical), ENERGYSTAR. compliant.



*Touchscreen on a WT36CL mounted at center position*

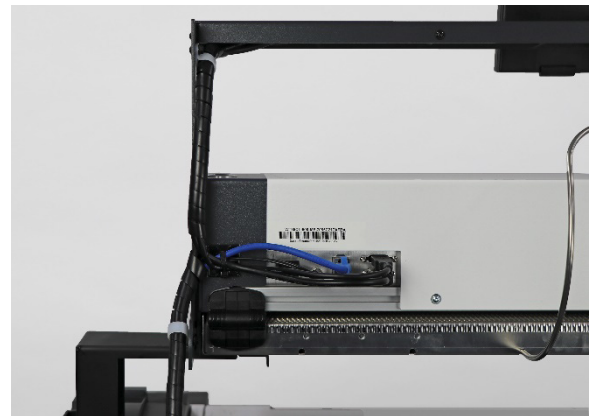

*Rear view of connector and cable guides*

## TECHNICAL DATA

Resolution	Full HD, 1920 x 1080 pixel, IPS display
Operation	10 point multi touch PCAP
Dimensions / Weight	Scanner width + 10 mm, 0.4-inch, 7,2 Kg, 16 lbs
Adjustments	Mounting position left, center and right, height and depth adjustable during installation
Connection	Display port, HDMI, VGA, USB2.0 touch
Electrical	90 – 240 V, 20 VA, 45 - 65 Hz
Order Number	WT36CL-SCREEN-BRIDGE, WT48CL-SCREEN-BRIDGE



### IMAGE ACCESS GMBH

Hatzfelder Str. 161-163  
42281 Wuppertal, Germany  
Phone: +49 202 27058-0

[www.imageaccess.de](http://www.imageaccess.de)

### IMAGE ACCESS LP

400 N. Belvedere Drive  
Gallatin, TN 37066, USA  
Phone: +1 (615) 675-4141

[www.imageaccess.us](http://www.imageaccess.us)