


WideTEK® 36CL  
eco

## Scanning Speed


The scanning speed depends on the settings for resolution and color depth. In grayscale scanning, the WideTEK® scanners use photometrically correct white light. This produces the best possible images. The following table shows the scan speed depending on the resolution.

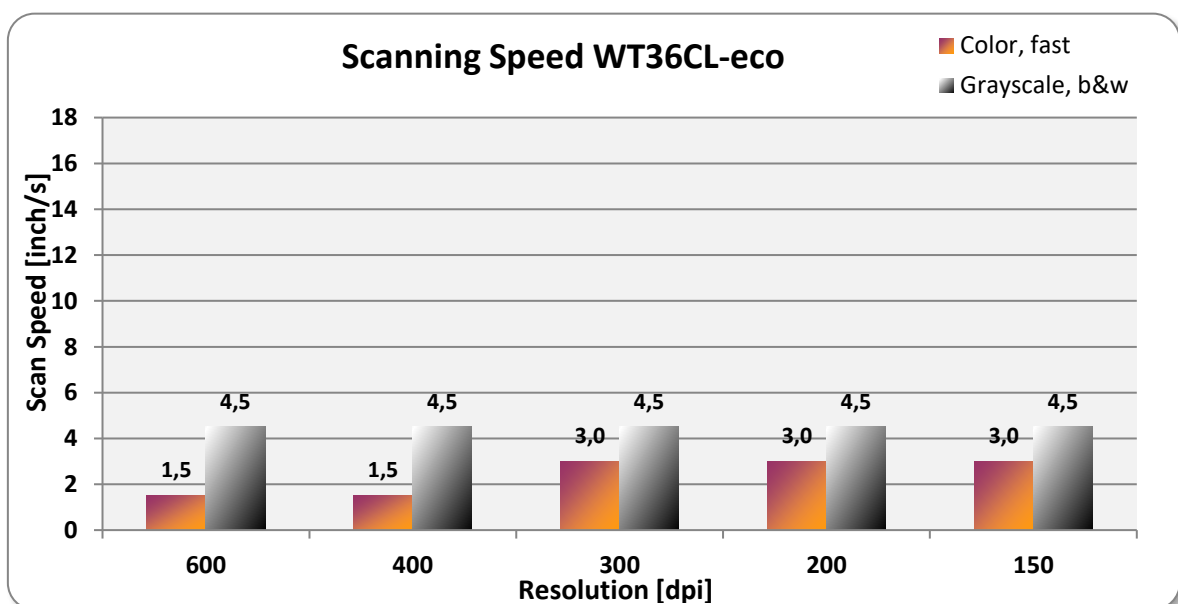


## Relation Between Document Length and Resolution

The maximum document length depends on three factors; resolution, color depths and document width. The WT36CL eco has 8 GB of memory built into the scanner, enough to scan a 36" wide document at 300dpi up to a length of 670" or 17 m. The following tables show the relation between the scanning length, document width, resolution, and color depth.

### 24bit Color:

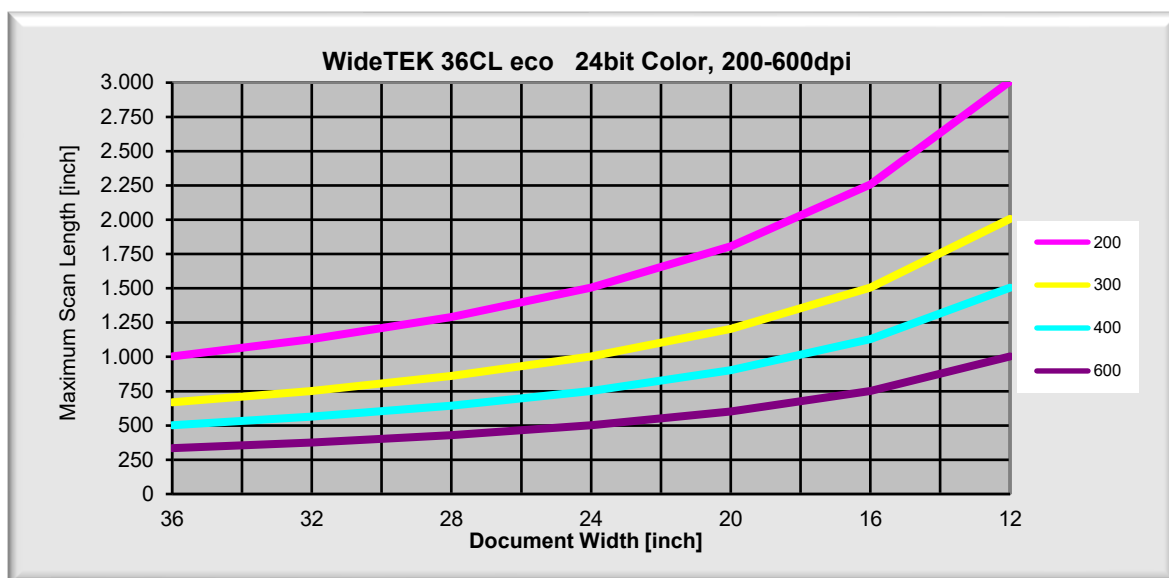

### Grayscale, Halftone and Bitonal:

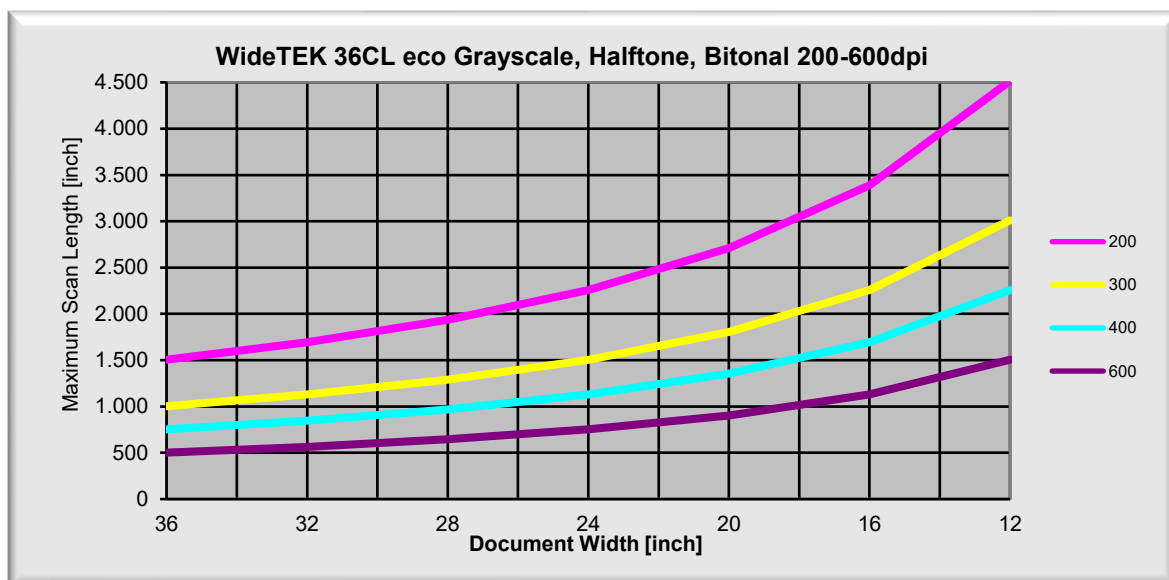

## Optical System

|                    |                                                                                                                                                                                 |
|--------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Document Width     | 965 mm (38 inch)                                                                                                                                                                |
| Scan Width         | 915 mm (36 inch)                                                                                                                                                                |
| Scan Direction     | Face up                                                                                                                                                                         |
| Scanner Resolution | 600 x 600 dpi                                                                                                                                                                   |
| Pixel Dimension    | 42 x 42 µm                                                                                                                                                                      |
| Sensor Type        | Three dual light CIS modules                                                                                                                                                    |
| Color Depth        | 48 bit color (internal resolution)<br>16 bit gray scale (internal resolution)                                                                                                   |
| Scan Modes         | 24 bit color, 8 bit grayscale,<br>bitonal, enhanced halftone                                                                                                                    |
| File Formats       | Multipage PDF (PDF/A) and TIFF, JPEG, JPEG 2000,<br>PNM, PNG, BMP, TIFF (Raw, G3, G4, LZW, JPEG),<br>AutoCAD DWF, JBIG, DjVu, DICOM, PCX, Postscript,<br>EPS, Raw data and more |

## Accuracy and Stitching

|                                 |                                       |
|---------------------------------|---------------------------------------|
| Accuracy in Scan Direction      | ± 0.08% across 36 inch scanning width |
| Accuracy in Transport Direction | ± 0.08% with new transport rollers    |

## Illumination System

|                        |                   |
|------------------------|-------------------|
| Light Source           | RGB LED           |
| Warm-up Time           | None              |
| Temperature Dependency | None              |
| UV / IR Emission       | None              |
| Lamp Lifetime          | 50,000 hours typ. |

## Electrical Specifications

### External Power Supply

|              |                |
|--------------|----------------|
| Voltage      | 100 – 240 V AC |
| Frequency    | 47 – 63 Hz     |
| ECO Standard | CEC level VI   |

### Scanner

|         |         |
|---------|---------|
| Voltage | 19 V DC |
| Current | 3 A     |

### Power Consumption

|                                                    |                                               |
|----------------------------------------------------|-----------------------------------------------|
| P <sub>(Off)</sub>                                 | 0.3W                                          |
| P <sub>(Sleep)</sub>                               | 2.6W                                          |
| P <sub>(Ready)</sub>                               | 17W (22W with the included monitor connected) |
| P <sub>(Active)</sub>                              | 30W (35W with the included monitor connected) |
| 65% below <a href="#">ENERGY STAR requirements</a> | <a href="#">Image Access FAQ</a>              |

### Document Specifications

|                    |                                        |
|--------------------|----------------------------------------|
| Document Length    | Up to 500 m (20.000 inch) <sup>1</sup> |
| Paper Grade        | Any                                    |
| Document Thickness | 2.5 mm (0.1 inch max.)                 |

<sup>1</sup> The maximum document length depends on the scan resolution and the scan output.

## Dimensions and Weight

|                                                              |                                            |
|--------------------------------------------------------------|--------------------------------------------|
| Scanner Outer Dimensions<br>(H x W x D)                      | 446 x 1184 x 222 mm<br>(18 x 47 x 9 inch)  |
| Weight of Scanner                                            | 14.5 kg (33 lbs.)                          |
| Weight of Floor Stand                                        | 10 (22 lbs.)                               |
| Transport Box Dimensions<br>(Carton Scanner) (H x W x D)     | 335 x 1190 x 250 mm<br>(13 x 47 x 10 inch) |
| Transport Box Dimensions<br>(Carton Floor Stand) (H x W x D) | 140 x 270 x 1100 mm<br>(6 x 11 x 43 inch)  |
| Scanner Weight, Ready to Ship                                | 15,55 kg (40 lbs.)                         |
| Floor Stand Weight, Ready to Ship                            | 11 kg (24 lbs.)                            |

## Ambient Conditions

|                       |                                                |
|-----------------------|------------------------------------------------|
| Operating Temperature | 5 to 40 °C (40 to 105 °F)                      |
| Storage Temperature   | 0° to 60 °C (32° to 140 °F)                    |
| Relative Humidity     | 20 to 80% (non-condensing)                     |
| Noise                 | < 35 dB(A) (Operating)<br>< 25 dB(A) (Standby) |

© 2026 by Image Access GmbH, Wuppertal, Germany.

Printed in Germany. All rights reserved. Reproduction in whole or in part in any form or medium without express written permission of Image Access is prohibited. Scan2Net®, Scan2Pad®, WideTEK® and BooTEK® are registered trademarks of Image Access. All other trademarks are the property of their respective owners.

Image Access reserves the right to change the described products, the specifications or documents at any time without prior notice. For the most recent version, always check our web site [www.imageaccess.de](http://www.imageaccess.de) or [www.imageaccess.us](http://www.imageaccess.us) or the customer service portal at [portal.imageaccess.de](http://portal.imageaccess.de)