


WideTEK® 44/48

*Wide format scanning and secure
job management for production.*

Widest color gamut in the industry.

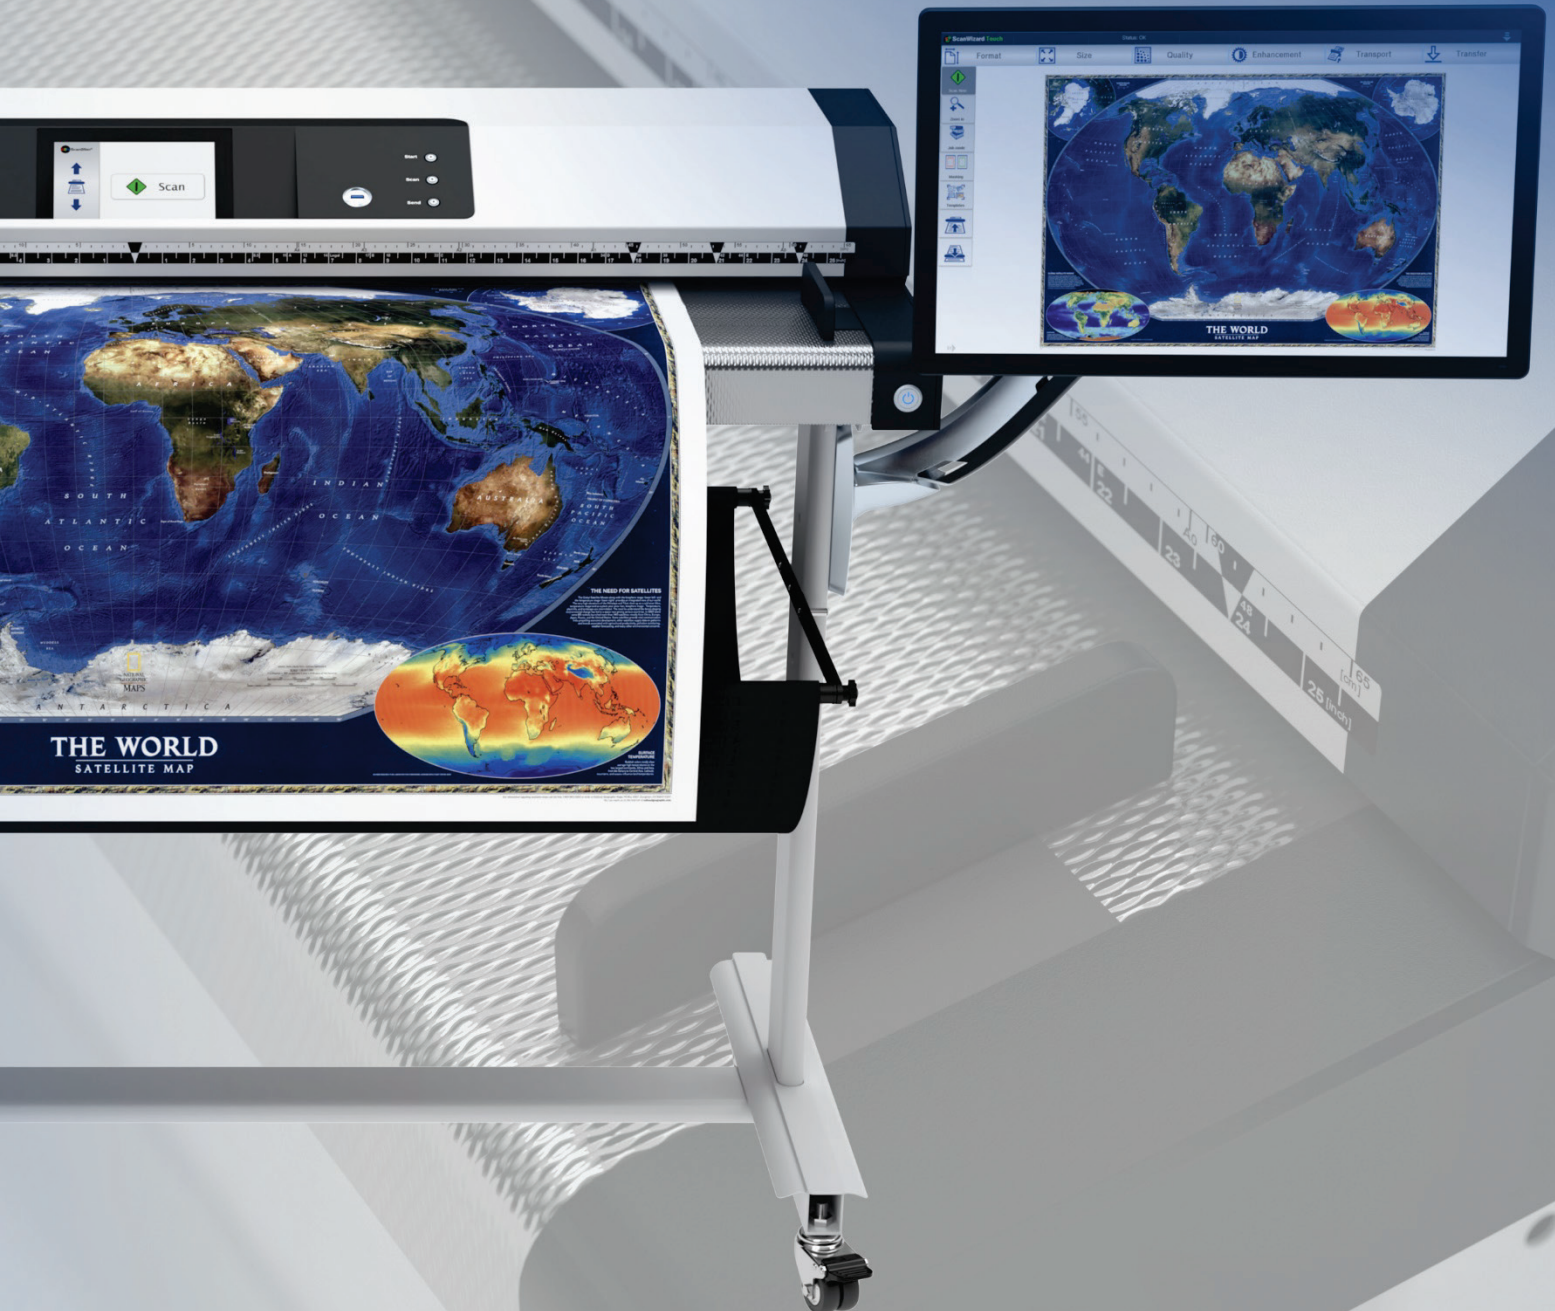

***Wide format scanning at its finest
Fastest scanner with 4 CCD cameras
Made in Germany at affordable prices***



© 11_2023 / EN



Safely scan historical and other large format documents at high speeds; up to 48 inches and with an image quality you have to experience yourself.

*Using the latest camera technology this scanner exceeds all criteria set forth in the FADGI *** guidelines and ISO 19264-1 level B.*

Sturdy design, highest quality and unrivaled speed




- SCANS UP TO 44 / 48 INCH WIDTHS
- FADGI AND ISO 19264-1 COMPLIANT
- ENDLESS SCANNING - SCAN UNLIMITED LENGTHS TO MULTIPAGE PDF
- CAPTURES 3D SURFACES, TEXTURES OF VARIOUS MATERIALS, BRAILLE PRINT
- FASTEST COLOR SCANNING, 15 INCHES PER SECOND @ 200 DPI
- 1200 x 1200 DPI SCANNER RESOLUTION
- HIGH RESOLUTION 7 INCH MULTI-TOUCH DISPLAY
- FACE UP SCANNING
- AUTOMATIC CROP AND DESKEW
- INTEGRATED 64BIT LINUX, INTEL CORE GEN 9, 250GB SSD, 16GB RAM
- EXTERNAL 22 INCH TOUCHSCREEN
- VIRTUAL RESCAN, MODIFY IMAGES WITHOUT RESCANNING
- OPTIONAL WHITE BACKGROUND FOR SEPIAS
- EASY INSTALLATION VIA SCAN2NET® TECHNOLOGY

Easy to use walk up scanning for large formats Gentle archival of historical and fragile documents

WideTEK® 44 and WideTEK® 48 wide format CCD scanners digitize documents up to 44 or 48 inches wide (1118 or 1220 mm) quietly and at astonishingly fast speeds. These CCD devices are perfect for large format scanning in offices or for production service providers scanning high volumes.

WideTEK® 44/48 gently scans due to special transport rollers that serve as pressure points ensuring safe document transport. For historical and fragile documents, this is critical. The unique background drum does not touch the glass plate at any time, avoiding scratches and document skews. To achieve extra contrast on sepias and film based documents, the standard black drum can be easily exchanged with a white drum, with no tools required.

State of the art illumination using bright white LEDs guarantees a long lifetime and low cost of ownership, since there are practically no consumables necessary over the life of the product. Cutting edge camera technology, with a dust-protected, fully sealed camera box holding CCD systems that use a patented stitching procedure, delivers a scanner resolution of up to 1200 dpi.

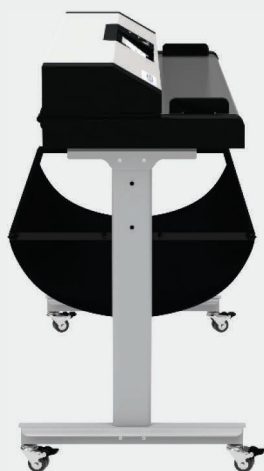

WideTEK® 44 is a smart investment. Scan 44 inch wide documents now and later upgrade to a WideTEK® 48 for 48 inches of scanning width.

Further highlights that make the WideTEK® 44 / 48 scanner the right choice for every application:

- Scan2USB – Walk up scanning to a USB device.
- Scan2Print – Copy to networked printers or hot folders.
- Scan2Pad® – Operation via tablets or other mobile devices.
- Scan2Network – Output to network resources, SMB, FTP.
- High resolution 7" multi-touch display.
- Output formats: PDF, PDF/A, JPEG, TIFF, PNM, multipage PDF and TIFF, DICOM and many more.
- OS independent, runs with Windows 8, 10, Linux, Mac.
- Uses any browser: IE, Safari, Chrome, Firefox.
- Remote maintenance, troubleshooting and firmware updates.
- Digital color balance, wide color gamut, supports sRGB, Adobe RGB, native RGB.

Options:

- Batch Scan Wizard for high volume scanning.
- 22" Full HD touchscreen.
- Full Coverage Warranty – Up to 5 years of free spare parts and consumables.



Markets and Applications

WideTEK® 44/48 is a valuable production device for numerous markets.

WideTEK® 44/48 Markets

- Architecture, Engineering, Construction, CAD
- Copy Services, Reprographics
- Mapping Services, GIS
- Media Control, Press Clipping Services
- Universities, Libraries, Registries

The applications are many and diverse. WideTEK® 44/48 fits nearly any application where you need wide format and production speeds.

WideTEK® 44/48 Applications

- Scanning maps, color posters, display graphics,
- Archiving artwork, photographs
- Archiving newspapers, periodicals, catalogs and magazines
- Archiving blueprints and sepias
- Scanning drafts and advertising, photos.

The Scan2Net® platform is the technological foundation of all WideTEK® and Bookeys® scanners from Image Access. It replaces the proprietary scanner drivers and software that traditional scanners require with the fastest common, nonproprietary inter-device connection available: TCP/IP over Ethernet. With network interface speeds much higher than USB 3.0 or camera link, Scan2Net® devices are able to reach unrivaled performance at extremely low connectivity cost.

Scan2Net® scanners feature a 64bit Linux based real time operating system, dedicated to scanner specific imaging and mechanical control tasks, maximizing scanning speeds and performance.

Scan2Net® Advantages

- 64bit Linux based computer, fast and virus protected
- Easy integration into existing network structures
- Only a single IP address is required to run the scanner
- Integration and remote access via the Intranet or even the Internet
- Scans directly to SMB, FTP, hot folders, USB, Email or the Cloud without an external PC
- Simple, intuitive operation, browser based
- Clear menu structure, operation via touchscreen
- Multilanguage support, customizable user interface

TECHNICAL DATA

Maximum Document Size	1270 mm (50 inch) width, for maximum length see Technical Specifications
Maximum Scan Width	WideTEK® 44: 1118 mm (44 inch) / WideTEK® 48: max. 1220 mm (48 inch)
Document Thickness	Max. 3.0 mm (0.1 inch)
Scanner Resolution / Optical Resolution	1200 x 1200 dpi (optionally 9600 dpi interpolated) / 1200 x 600 dpi
Speed 24 bit Color, full width	200 dpi – 22.9 m/min (15 inch/s), 300 dpi – 15.4 m/min (10.1 inch/s) 600 dpi – 7.6 m/min (5 inch/s), 1200 dpi – 3.8 m/min (2.5 inch/s)
Speed 8 bit Grayscale, full width	Same as color
Color Depth	48 bit color, 16 bit grayscale
Scan Output	24 bit color, 8 bit grayscale, bitonal, enhanced halftone
File Formats	Multipage PDF (PDF/A) and TIFF, JPEG, JPEG 2000, PNM, PNG, BMP, TIFF (Raw, G3, G4, LZW, JPEG) AutoCAD DWF, JBIG, DjVu, DICOM, PCX, Postscript, EPS, Raw data and more
ICC Profiles	Embedded for sRGB, Adobe RGB and native. Individual profiling via web based Scan2ICC subscription
Quality	Complies to FADGI *** guidelines, ISO 19264-1
Camera	Four Tri-color CCD cameras, 90,000 pixels, encapsulated and dust-proof
Light Source	Two linear lamps with white LEDs, no IR/UV emission
Computer	64 bit Linux, Intel® Core™ Gen 9 processor, 250GB SSD, 16GB RAM for very long scans
Touchscreen / Monitor	7 inch multi-touch display / 22 inch touchscreen (included in the bundle)
USB Port	1 x USB 3.0 port
Interface	1 GBit Fast Ethernet with TCP/IP based Scan2Net® Interface
Dimensions / Weight	H x W x D: 228 x 1425 x 507 mm (9 x 56 x 20 inch) / 60 kg (132 lbs.)
Electrical Connection	100 – 240 V AC, 47 – 63 Hz (external power supply, complies with ECO standard CEC level VI)
Power Consumption	P _(Off) 0.3W / P _(Sleep) 4.5W / P _(Ready) 60W / P _(Active) 120W (63% below ENERGY STAR requirements)
Environment	Operating temperature 5 to 40 °C (40 to 105 °F), relative humidity 20 to 80% (non-condensing)
Noise	< 35 dB(A) (Scanning) / < 25 dB(A) (Standby)
Monitor Options / Stand Options	WT-TOUCH22 / WT36-STAND , WT36-STAND-ADJ
Approvals	IEC/EN 62368-1:2014 Ed.2, AUS/NZL 62368-1:2014 Ed.2, RoHS, WEEE UL 62368-1:2014 Ed.2, CSA 62368-1:2014 Ed.2



Visit our homepage!

IMAGE ACCESS GMBH

Hatzfelder Str. 161-163
42281 Wuppertal, Germany
Phone: +49 202 27058-0

www.imageaccess.de

IMAGE ACCESS LP

400 N. Belvedere Drive
Gallatin, TN 37066, USA
Phone: +1 (615) 675-4141

www.imageaccess.us

Technical changes, errors and omissions excepted.
All information subject to change. © Image Access GmbH 2023